

Step Deck

Flatbed



Manufactured by:

Behnke Enterprises, Inc. ■ 800 9th Ave. NW, Farley, IA 52046 ■ Ph. (563)744-3246 ■ Fax (563)744-9066 ■ www.behnkeenterprises.com

Step Deck Flatbed Trailer

Construction/Ag

Model	Top Deck	Bottom Deck	Axle	Tire
FB8X45SS-60L	11', 12' or 13'	32', 33' or 34'	(2) 22,500 lb.	(8) 235/75R-17.5 16-Ply Tire
FB8X45SS-60H	11', 12' or 13'	32', 33' or 34'	(2) 25,000 lb., Oil Bath HD w/ ABS	(8) 255/70R-22.5 16-Ply Tire
FB8X48SS-60H	11', 12' or 13'	35', 36' or 37'	(2) 25,000 lb., Oil Bath HD w/ ABS	(8) 255/70R-22.5 16-Ply Tire
FB8X48SS-60L	11', 12' or 13'	35', 36' or 37'	(2) 22,500 lb.	(8) 235/75R-17.5 16-Ply Tire
Main Frame	16" I-Beam, 26 lbs. per foot • 3" Crossmembers on 16" Centers • 1" CR Round Knee Braces Throughout Frame, Steel Over Wheels			
Capacity	60,000 lb. GVW			
Deck Height	37" Unloaded (60L) or 40" Unloaded (60L)			
Axles	(2) 22,500 lb. axles (60L) or (2) 25,000 lb. axles (60H) -- Oil bath heavy duty with ABS			
Top Deck	2 x 8 Treated Pine; 11', 12' or 13' Long (102" wide with rub rail & stake pockets)			
Bottom Deck	2 x 8 Treated Pine; 32', 33' or 34' Long (102" wide with rub rail & stake pockets)			
Toolbox	(1) 18" x 18" x 48" Toolbox			
Lighting	DOT Approved, All Sealed Rubber Mounted LED			
Hitch	2" King Pin			
Tie Downs	Stake Pockets and Rub Rail w/ Single Pipe Spools			
Jack	(2) Dual Speed Semi-Style Landing Gear			
Finish	Zinc Rich Primed and Powder Coated -- Standard: Black, Red, Blue, Gray & Yellowstone Reflector Tape • Mud Flaps			



Optional Air Ramps



Manufactured by:


Behnke Enterprises, Inc. ■ 800 9th Ave. NW, Farley, IA 52046 ■ Ph. (563)744-3246 ■ Fax (563)744-9066 ■ www.behnkeenterprises.com

Step Deck Flatbed Trailer

OTR (Over The Road)

Model	Top Deck	Bottom Deck	Axle	Tire
FB8X48SS-OTR-60SL	10'	38'	(2) 22,500 lb.	(8) 235/75R-17.5 16-Ply Tire
FB8X48SS-OTR-60L	10'	38'	(2) 22,500 lb.	(8) 235/75R-17.5 16-Ply Tire
FB8X48SS-OTR-60H	10'	38'	(2) 25,000 lb.	(8) 255/70R-22.5 16-Ply Tire
FB8X53SS-OTR-60SL	10'	43'	(2) 22,500 lb.	(8) 235/75R-17.5 16-Ply Tire
FB8X53SS-OTR-60L	10'	43'	(2) 22,500 lb.	(8) 235/75R-17.5 16-Ply Tire
FB8X53SS-OTR-60H	10'	43'	(2) 25,000 lb.	(8) 255/70R-22.5 16-Ply Tire

Main Frame	1 Piece I-Beam Construction • 4" Jr. I-Beam Crossmembers on 16" Center 3/16" Formed, Knee Braces Throughout Frame (80 KSI)
Capacity	60,000 lb. GVW
Lower Deck Height	30" (60SL), unloaded • 35" (60L), unloaded • 40" (60H), unloaded
Upper Deck Height	58", unloaded
Decking	Apitong
Suspension	RAR260 Ridewell Air Ride
Toolbox	(1) 18" x 18" x 48" Toolbox* (driver side--between spread axles) *NOTE: 60SL model has (2) 12" x 18" x 48" toolboxes rather than (1) 18 x 18 x 48"
Lighting	DOT Approved, All Sealed Rubber Mounted LED
Hitch	2" King Pin
Tie Downs	Stake Pockets and Rub Rail w/ Single Pipe Spools
Jack	(2) Dual Speed Semi-Style Landing Gear
Finish	Zinc Rich Primed and Powder Coated -- Standard: Black, Red, Blue, Gray & Yellowstone Reflector Tape • Mud Flaps

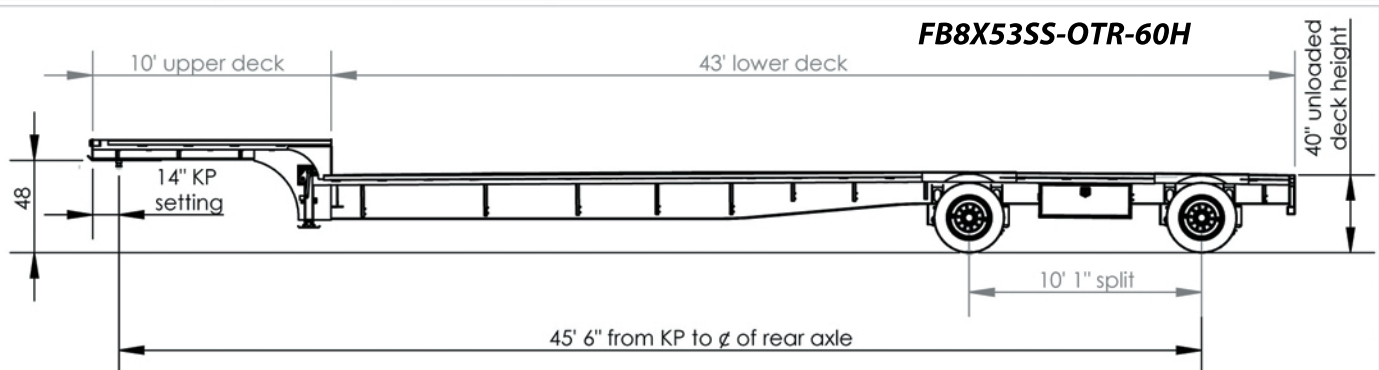

Manufactured by:

Behnke Enterprises, Inc. ■ 800 9th Ave. NW, Farley, IA 52046 ■ Ph. (563)744-3246 ■ Fax (563)744-9066 ■ www.behnkeenterprises.com

Step Deck

Flatbed



6' Beavertail with Flip-over Ramps



FB8X42SS-60L



FB8X53SS-OTR-60L



6' Beavertail with
Optional Third Load
Ramp



Manufactured by:

Behnke Enterprises, Inc. ■ 800 9th Ave. NW, Farley, IA 52046 ■ Ph. (563)744-3246 ■ Fax (563)744-9066 ■ www.behnkeenterprises.com