

DIRECTIONAL BORING TRAILER

14,000 GVW • 16,000 GVW • 20,000 GVW • 24,000 GVW




Manufactured by: Behnke Enterprises, Inc. • 800 Ninth Ave. NW • Farley, IA 52046 • (563)744-3246 • www.behnkeenterprises.com

DIRECTIONAL BORING TRAILER

14,000 GVW • 16,000 GVW • 20,000 GVW • 24,000 GVW

<p>14,000 GVW Standard Equipment 3" x 5" x 1/4" Angle Frame Upper Frame 2" x 8" x 3/16" Tube Lower Frame (2) 7,000 lb. Torflex Dexter E-Z Lube Axles (4) ST235/80R16E Single, 10-Ply, Tire and Wheel</p>		<p>16,000 GVW Standard Equipment 5" x 5" x 5/16" Angle Frame Upper Frame 2" x 8" x 3/16" Tube Lower Frame (2) 8,000 lb. Torflex Dexter E-Z Lube Axles (4) 215-75R-17.5 Single, 16-Ply, Tire and Wheel</p>	
<p>20,000 GVW Standard Equipment 5" x 5" x 5/16" Angle Frame Upper Frame 2" x 8" x 1/4" Tube Frame for Lower Frame (2) 10,000 lb. Torflex Dexter Oil Bath Axles (4) 235-75R-17.5 Super Single, 18-Ply, T & W</p>		<p>24,000 GVW Standard Equipment 5" x 5" x 5/16" Angle Frame Upper Frame 2" x 8" x 3/8" Tube Frame for Lower Frame (2) 12,000 lb. Torflex Dexter Oil Bath Axles (4) 235-75R-17.5 Super Single, 18-Ply, T & W</p>	
Brakes	Electric and Forward Self-Adjusting Brakes, Both Axles		
Pallet Fork Holders	Pallet Fork Holders		
Coupler	Pintle Hitch		
Jack	(1) 10,000 lb. Heavy Duty Spring Loaded Jack		
Solid Front Rail	Solid Front Rail		
Flush Floor	Flush Floor/No Lip		
Cylinder	Cushion Cylinder with Needle Valve		
Latch Mechanism	Bolt-on tilt latch mechanism (<i>Easily replaceable for repairs</i>)		
Lights	Rubber Mounted LED Lights		
Stake Pockets	Stake Pockets		
Tilt Deck	Tilting deck on driver's side (<i>can be on passenger side if requested</i>)		
Tie-downs	(4) D-rings - 2 on rear corners of tilt deck, 2 on front stationary		
Crossmembers	12" on center crossmembers		
Decking	2 x 8 Treated Pine		
Fenders	(2) Extra Heavy 1/8" Formed Fenders		
	Light Plug Holder		
	Modular Wire Harness		
	12-Volt Breakaway Kit with Full Charge Indicator, Switch, and Battery		
	Reflector Tape		
	(2) 3/8" grade 43 Safety Chains		
Finish	Zinc Rich Primed and Powder Coated—Standard: Black, Red, Blue, Gray & Yellowstone		
Tilt Width	53 1/4"		
Side Stationary Width	29 3/4"		
Tilt Length	18'		
Front Stationary Length	4', 6', or 8'		

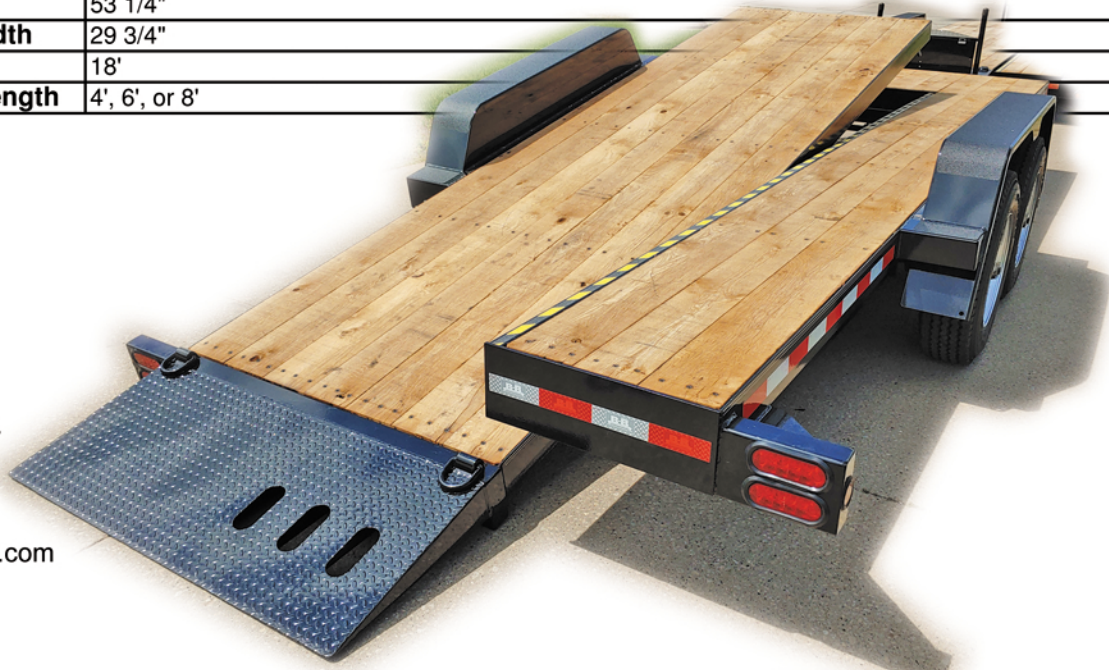

Manufactured by:
 Behnke Enterprises, Inc.
 800 Ninth Ave. NW
 Farley, IA 52046
 PH. (563)744-3246
 www.behnkeenterprises.com